

# TD30DX

## CONTROLLER

Storage Air Temperature adjustment -  
 electronic thermostat  
 alarm code  
 Defrost - (Hot gas) : Automatic & Manual

## COMPRESSOR

Model : CR211L  
 Discharge : 110 cc / rev  
 Comp. oil : Diamond Freeze MA32 (350cc)  
 Safety Device : Discharge temp. sensor

## EVAPORATOR

Type : Copper Pipe , Aluminum Fin  
 Fan : Centrifugal, Directly connected to  
 fan motor  
 Rpm : 2000  
 Fan motor : 70W x 1

For small trucks (1.5~3.5 tons)


# TD30DX

Split type

For low temperature (DX)

Cooling capacity Temperature inside the refrigeratory (External air temperature 35°C)

0°C : 3,490W (3,000kcal/h)  
 -18°C : 2,150W (1,850kcal/h)  
 -25°C : 1,630W (1,400kcal/h)

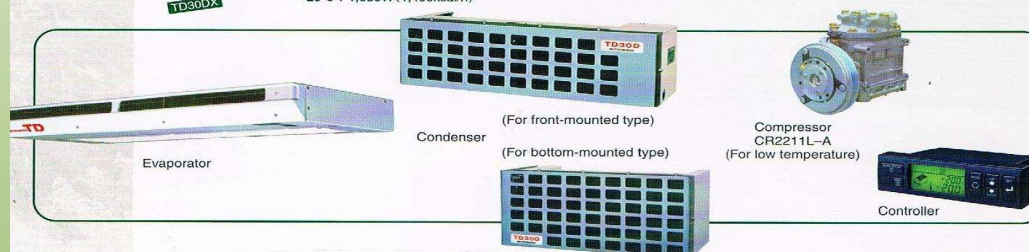

Direct-driven model

These are the most popular units ranging from low-temperature truck of 2 tons to medium-temperature truck of 3.5 tons.

## CONDENSER

Type : Parallel flow, Aluminum fin  
 Fan : Propeller fan x 2  
 Rpm : 2100 / 2300  
 Fan motor : 75W x 1 / 40 x 1

Specifications			
MODEL		TD30DX/24V	
Refrigerant R404a		V-BELT	
Refrigeration Capacity	0°C	3490 W	3000 Kcal/hr
	-18°C	2150 W	1850 Kcal/hr
	-25°C	1630 W	1400 Kcal/hr
Compressor		CR2211L-A-8	
Total weight of product		88kg	
Power consumption		12 amps	