

TD14CX

COMPRESSOR

Model : CR2211A

Discharge : 110 cc / rev

Comp. oil : PAG56 – 320 cc

Safety Device : Discharge temp. sensor

CONTROLLER

Storage Air Temperature adjustment -
electronic thermostat
alarm code

(Hot gas) : Automatic & Manual

CONDENSER

Type : Aluminum Parallel flow, Aluminum fin
Fan : Propeller fan x 1 & Directly connected
to fan motor

Rpm : 2300

Fan motor : 40W x 1

EVAPORATOR

Type : Copper Pipe , Aluminum Fin

Fan : Propeller Fan x 2 Directly connected to fan motor

Rpm : 2050

Fan motor : 40W x 2

TD14CX


Split type

For medium
temperature

Super-slim evaporator with thickness
of 113mm saves considerable space
inside the refrigerator, thus
enhancing the operating
performance.



Refrigerating capacity Temperature inside the refrigerator 0°C : 1,620W(1,400kcal/h)
(External air temperature 35°C)

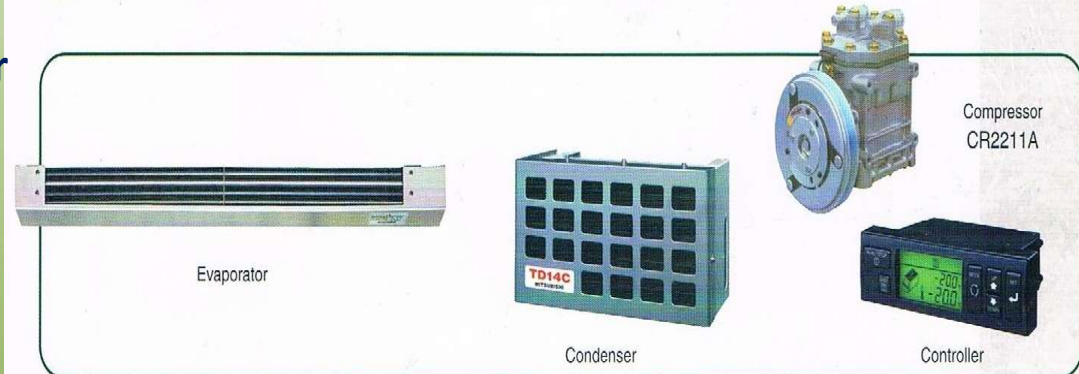

Specifications			
MODEL	TD14/24V		
Refrigerant R404a	V-BELT		
Refrigeration Capacity	0°C	1620 W	1400 Kcal/hr
Compressor	CR2211A-7		
Total weight of product	43kg		
Power consumption	9 amps		